

# Linear Audio Visual and Graphic post



Graphics are not supplied

*This audio visual unit will capture your visitors attention. A sophisticated aluminium finish stand, helping give you maximum visual impact in any situation*

## features & benefits

- Portable and easy to assemble
- Anodised aluminium construction
- Available with 50mm round post
- 450mm dia steel dome bases supplied as standard with extra weight for higher stability
- Supplied with an LCD bracket
- Overall assembled size  
1860mm (h) x 450mm (d) approx



450mm dia Steel dome  
(weight 7.5kg approx)

*Recommended  
carry bag: LPB*



Extra weight for dome base  
(weight 9kg approx)



Small LCD bracket  
(weight 1kg approx)

## hardware & graphic specifications

Hardware dimensions (mm):

1860mm (h) x450mm (d) approx

Weight:

18kg approx

For Graphic size please refer to Graphic template

LCD bracket:

Max weight 4kg

# Assembly Instructions

## Linear Kit includes:

450mm dia Steel dome base & M10 bolt  
(weight 6kg approx)



Small LCD bracket.  
(LCD not included)

Male post x 1  
(weight 1kg approx)



Female post x 1  
(weight 1kg approx)



Allen key set



PVC clear washer x 1




Extra weight for dome base




stand-off x3




Brass Insert (rail) x 3

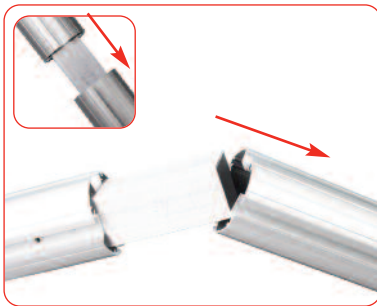

Align and slide female post over male post.



To attach the screen, align screw fixings with holes on rear of LCD screen. Fix LCD bracket in place with screws provided.




Slide the LCD bracket into the channel. Move to the required position.



Once in position, tighten the bracket onto the linear post



Attach base to male post using M10 bolt and allen key. Ensure clear washer is between base & post




Screw the brass rail insert into the standoff.



Fit the standoff into the rail channel, turn clockwise to secure.



Unscrew and remove the standoff cap.



Align the drilled holes in the substrate over the standoff.



Refit the standoff cap to secure the substrate.